LORO-X COMPOSITE PIPE WITH 1 SOCKET 1500 MM DN 80

LORO multilayer pipe 1500 mm DN 80

Beschrijving

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 1500 mm long, DN 80

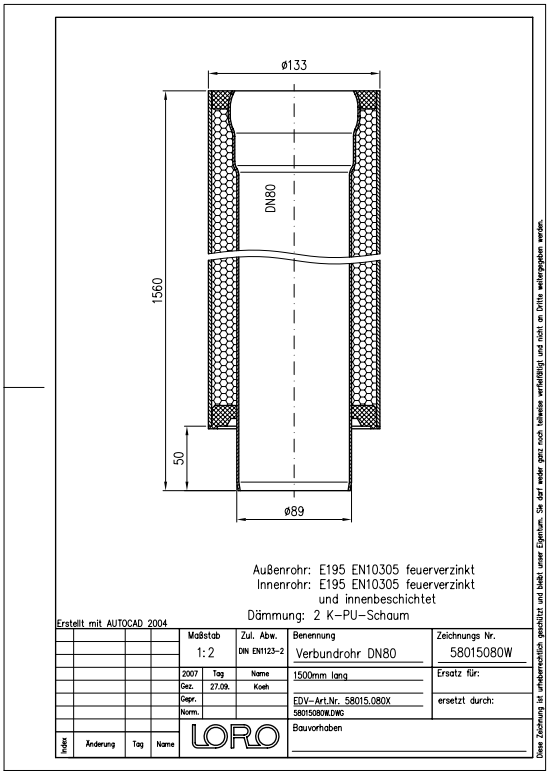

Artikelgegevens

EAN-code	**4038088049495**
ETIM Klasse	**EC010225**
Nominale diameter	**DN 80**
Nominale lengte/graad	**1500**
Buitenafmetingen (HxBxL)	**133 x 133 x 1560 mm**
Gewicht	**17,40 Kg (STK)**
Productgroep	**3**
Douanetariefnummer	**73063012**
Materiaal / Kleur	**Stahl feuerverzinkt, Silber**

Gebruiksaanwijzing

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Downloads

Alles online

Installatiehandleiding (PDF)
Maattekening (PDF)
Brochure (PDF)
CAD 2D (DXF)
CAD (DWG)