LORO-X COMPOSITE PIPE WITH CLEANOUT DN 80

LORO multilayer pipe with cleaning opening 500 mm DN 80

Bestektekst

LORO-X compound pipe with clean-out opening (projecting), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN 80

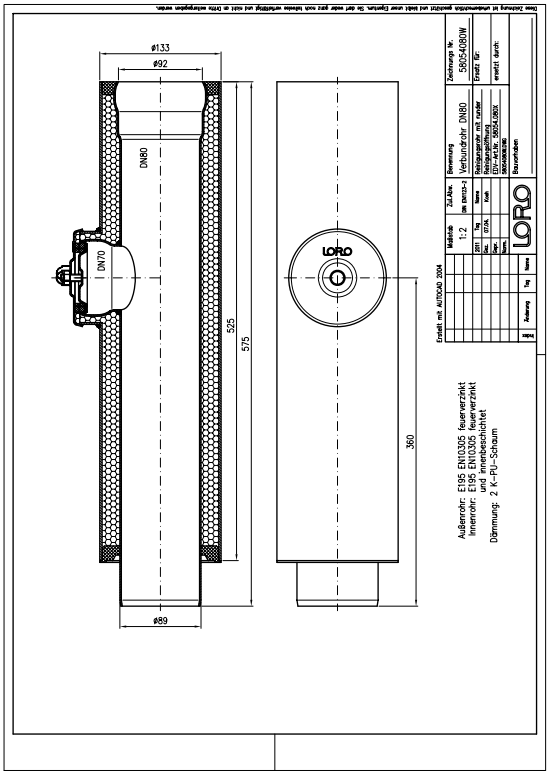

Artikelgegevens

EAN-code	**4038088086438**
ETIM Klasse	**EC010323**
Nominale diameter	**DN 80**
Nominale lengte/graad	**500**
Buitenafmetingen (HxBxL)	**181 x 133 x 575 mm**
Gewicht	**7,60 Kg (STK)**
Productgroep	**3**
Douanetariefnummer	**73063012**
Materiaal / Kleur	**Stahl feuerverzinkt, Silber**

Gebruiksaanwijzing

kein Verwendungshinweis notwendig

Downloads

Alles online

Installatiehandleiding (PDF)
CAD 2D (DXF)
Maattekening (PDF)
CAD (DWG)
Brochure (PDF)