


## LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 3000 MM DN 150

LORO multilayer pipe SILENT 3000 mm DN 150

### Описание

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 3000 mm long, DN150

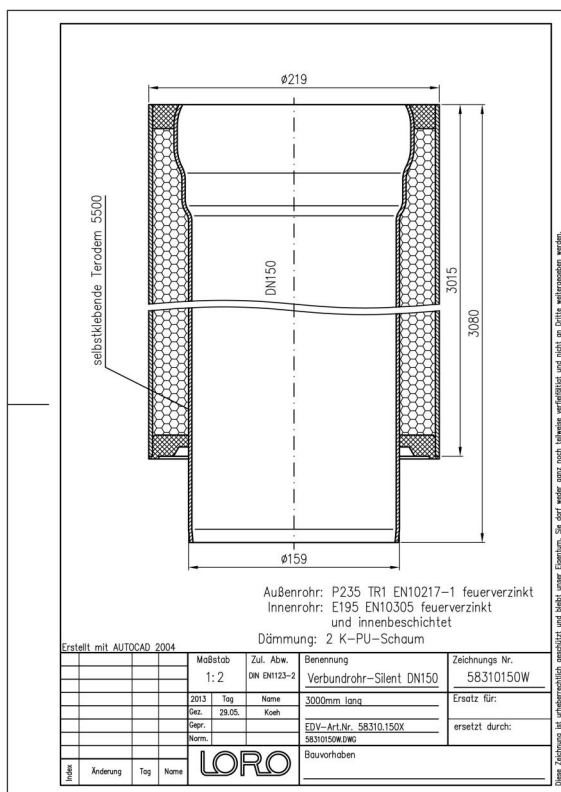

### Данни за артикула

|                          |                             |
|--------------------------|-----------------------------|
| ЕАН код                  | 4038088025611               |
| ЕТИМ клас                | EC010225                    |
| Номинален диаметър       | DN 150                      |
| Номинална дължина/градус | 3000                        |
| Външни размери (ВхШхД)   | 219 x 219 x 3080 mm         |
| Тегло                    | 93,60 Kg (STK)              |
| Продуктова група         | 3                           |
| Митнически тарифен номер | 73063018                    |
| Материал / Цвят          | Stahl feuerverzinkt, Silber |

### Забележка за употреба

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

### Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[CAD чертеж \(PDF\)](#)

[CAD \(DWG\)](#)

[Брошура \(PDF\)](#)