


## LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 250 MM DN 125

LORO multilayer pipe SILENT 250 mm DN 125

### Leírás

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 250 mm long, DN125

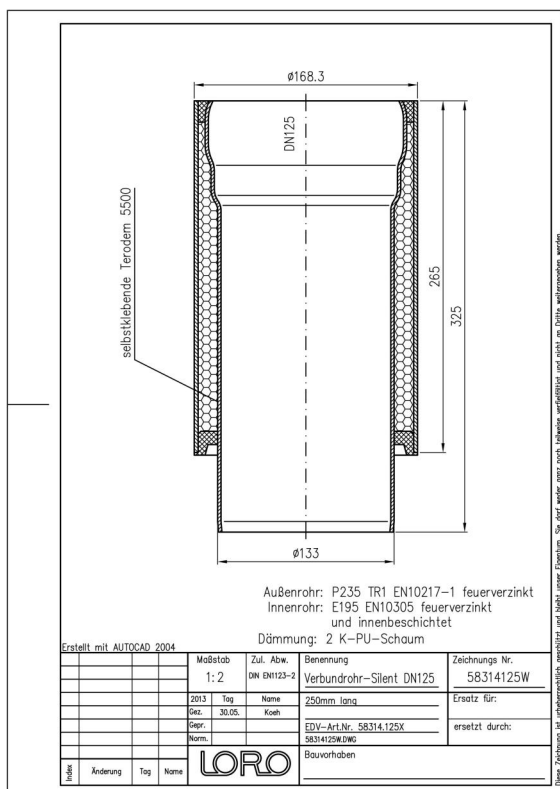

### Cikkadatok

|                        |                             |
|------------------------|-----------------------------|
| EAN kód                | 4038088025802               |
| ETIM osztály           | EC010225                    |
| Névleges átmérő        | DN 125                      |
| Névleges hossz/fok     | 250                         |
| Külső méretek (MxSzxH) | 168 x 168 x 325 mm          |
| Súly                   | 7,10 Kg (STK)               |
| Termékcsoport          | 3                           |
| Vámtarifaszám          | 73063018                    |
| Anyag / Szín           | Stahl feuerverzinkt, Silber |

### Használati megjegyzés

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

### Letöltések



Alles online

[Szerelési útmutató \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Méreterajz \(PDF\)](#)  
[CAD \(DWG\)](#)

[Prospektus \(PDF\)](#)