

## LORO-X SILENT COMPOSITE PIPE WITH 1 SOCKET 4000 MM DN 100

### LORO-Composite Pipe SILENT 4000 mm DN 100

#### Descriere

LORO-X compound pipe, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 4000 mm long, DN100




#### Date articol

|                               |                             |
|-------------------------------|-----------------------------|
| Cod EAN                       | 4038088052273               |
| Clasă ETIM                    | EC010225                    |
| Diametru nominal              | DN 100                      |
| Lungime/grad nominal          | 4000                        |
| Dimensiuni exterioare (îxLxA) | 133 x 133 x 4070 mm         |
| Greutate                      | 64,50 Kg (STK)              |
| Grupă de produse              | 3                           |
| Număr tarif vamal             | 73063012                    |
| Material / Culoare            | Stahl feuerverzinkt, Silber |

#### Notă de utilizare

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

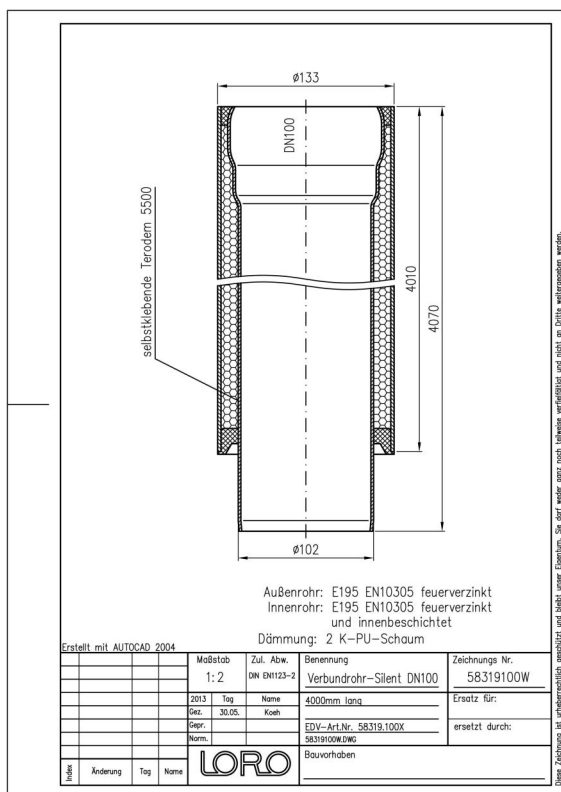

#### Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Desen CAD \(PDF\)](#)  
[CAD \(DWG\)](#)

[Broșură \(PDF\)](#)