

LORO-X SILENT COMPOSITE BRANCH 45 DEGREE DN 125/125

LORO-Composite pipe branch SILENT 45 degrees DN 125/125

Leírás

LORO-X compound pipe branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN125




Cikkadatok

EAN kód	4038088026106
ETIM osztály	EC003025
Névleges átmérő	DN 125, DN 125
Névleges hossz/fok	45
Külső méretek (MxSzxH)	168 x 345 x 415 mm
Súly	13,10 Kg (STK)
Termékcsoport	3
Vámtarifaszám	73089098
Anyag / Szín	Stahl feuerverzinkt, Silber

Használati megjegyzés

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus:Innenrohr mit Schallschutzfolie,PU-
Dämmschicht, Baustoffklasse B2, FCKW-
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X
Stahlabflussrohr) Achtung: Sonderanfertigung - keine
Lagerware.

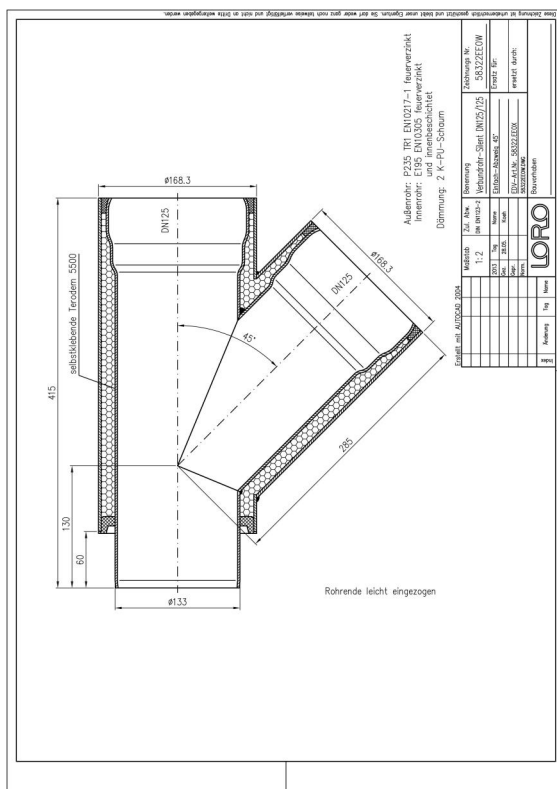

Letöltések



Alles online

[Szerelési útmutató \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Méterrajz \(PDF\)](#)
[CAD \(DWG\)](#)
[Prospektus \(PDF\)](#)