


LORO-X SILENT COMPOSITE BRANCH 45 DEGREE DN 150/150

LORO-Composite pipe branch SILENT 45 degrees DN 150/150

Opis

LORO-X compound pipe branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN150

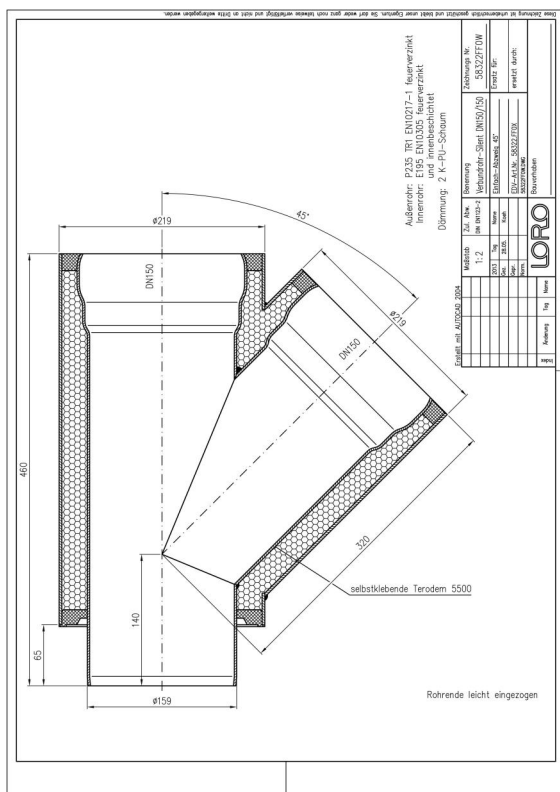

Podatki o izdelku

EAN koda **4038088026113**

ETIM razred **EC003025**

Nazivni premer **DN 150, DN 150**

Nazivna dolžina/stopinja **45**

Zunanje mere (VxŠxD) **219 x 413 x 460 mm**

Teža **21,50 Kg (STK)**

Skupina izdelkov **3**

Carinska tarifna številka **73089098**

Material / Barva **Stahl feuerverzinkt, Silber**

Opomba za uporabo

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Merska risba \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)