

LORO-X SILENT COMPOSITE REDUCING BRANCH 45 DEGREE DN 50/40

LORO-Composite Pipe Red. branches SILENT 45 degrees DN 50/40

Besedilo za popis del

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 45 degrees, DN50/40



Podatki o izdelku

EAN koda **4038088093153**

ETIM razred **EC003025**

Nazivni premer **DN 50, DN 40**

Nazivna **45**

dolžina/stopinja

Zunanje mere **89 x 198 x 227 mm**
(VxŠxD)

Teža **1,50 Kg (STK)**


Skupina izdelkov **3**

Carinska tarifna **73089098**
številka

Material / Barva **Stahl feuerverzinkt, Silber**

Opomba za uporabo

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus: Innenrohr mit Schallschutzfolie, PU-
Dämmschicht, Baustoffklasse B2, FCKW-
frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X
Stahlabflussrohr) Achtung: Sonderanfertigung - keine
Lagerware.

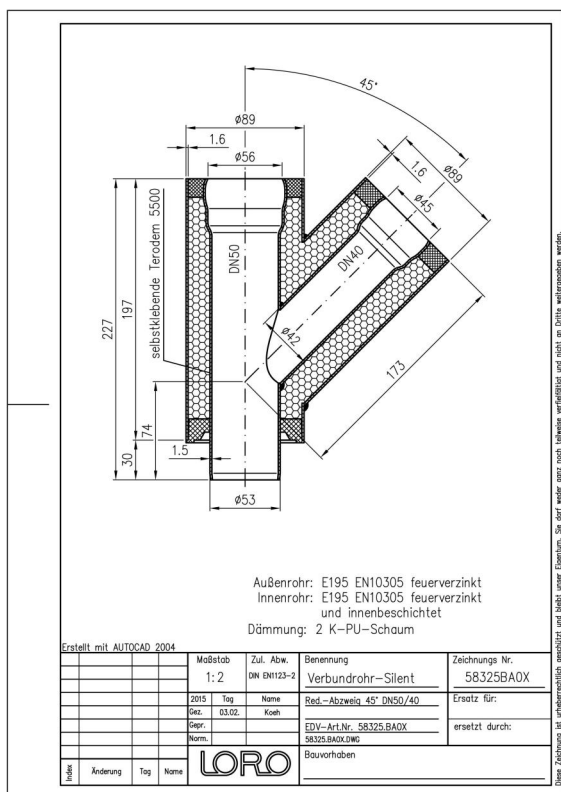

Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Merska risba \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)