## LORO-X SILENT COMPOSITE BEND 87 DEGREE DN 100

**LORO-Composite pipe bend SILENT 87 degrees DN 100**

### Περιγραφή

LORO-X compound pipe bend, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 87 degrees, DN100

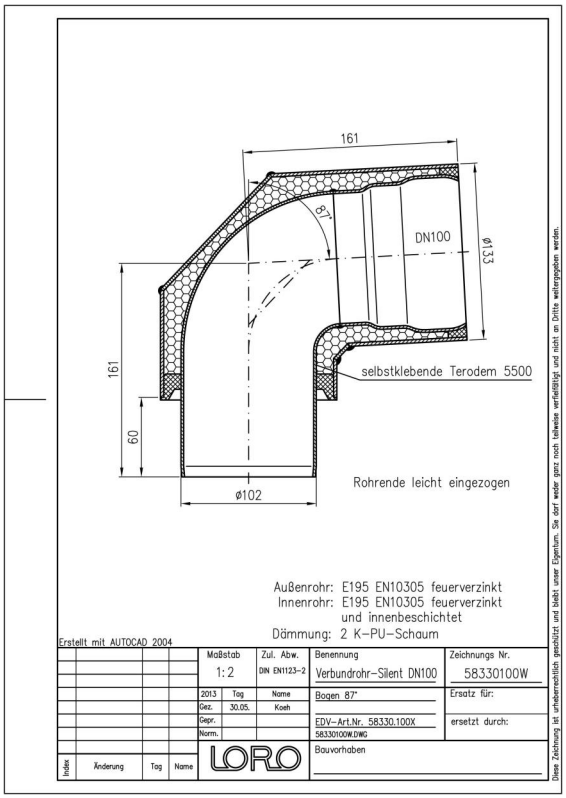


### Στοιχεία προϊόντος

| | |
|---|---|
| Κωδικός EAN | **4038088026229** |
| Κατηγορία ETIM | **EC003024** |
| Ονομαστική διάμετρος | **DN 100** |
| Ονομαστικό μήκος/μοίρες | **87** |
| Εξωτερικές διαστάσεις (ΥxΠxΜ) | **133 x 231 x 236 mm** |
| Βάρος | **4,10 Kg (STK)** |
| Ομάδα προϊόντων | **3** |
| Δασμολογικός αριθμός | **73089098** |
| Υλικό / Χρώμα | **Stahl feuerverzinkt, Silber** |

### Σημείωση χρήσης

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus:Innenrohr mit Schallschutzfolie,PU-Dämmschicht, Baustoffklasse B2, FCKW-frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

### Λήψεις

Alles online

Οδηγίες εγκατάστασης (PDF)
CAD 2D (DXF)
Σχέδιο διαστάσεων (PDF)
CAD (DWG)
Φυλλάδιο (PDF)
BIM IFC4 (parametrisch)