LORO-X SILENT COMPOUND TRANSITION PIPE CONCENTRIC DN 32/40

LORO-Connection Red. transition pipe SILENT DN 32/40

Tarjouspyyntöteksti

LORO-X compound pipe transition pipe SILENT, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound-damping mat (attached to inner pipe), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), concentric reducer, DN32/40

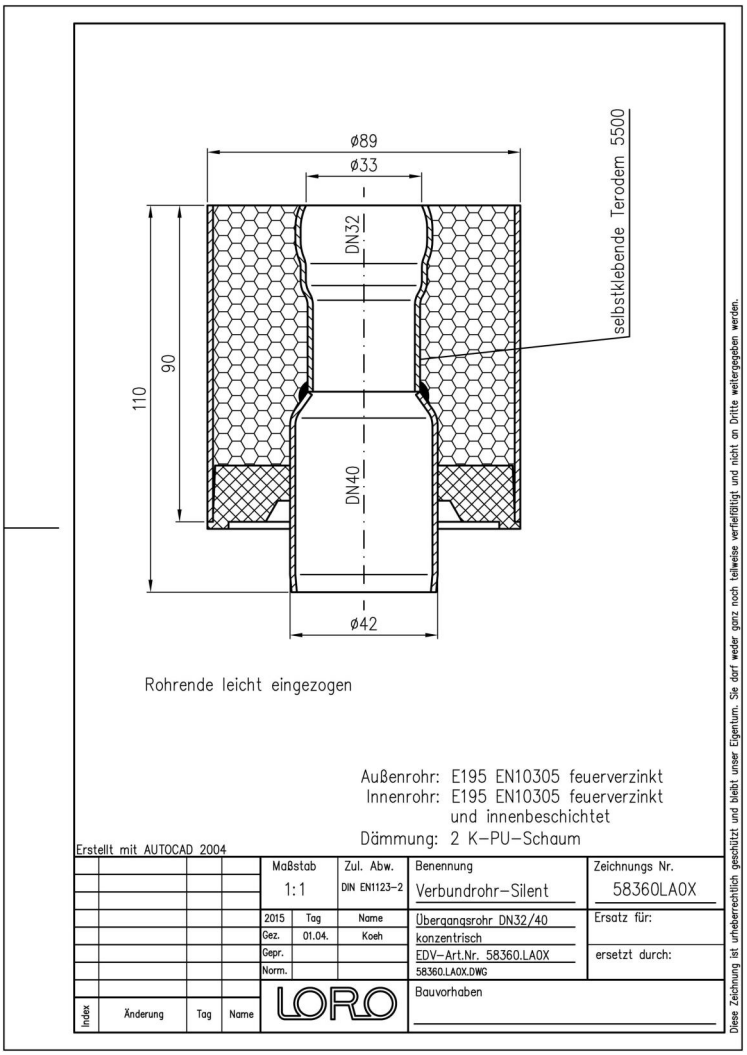

Tuotetiedot

EAN-koodi	**4038088093252**
ETIM-luokka	**EC003024**
Nimellishalkaisija	**DN 32, DN 40**
Ulkomitat (KxLxS)	**89 x 89 x 110 mm**
Paino	**0,50 Kg (STK)**
Tuoteryhmä	**3**
Tullitariffin numero	**73089098**
Materiaali / Väri	**Stahl feuerverzinkt, Silber**

Käyttöohje

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus:Innenrohr mit Schallschutzfolie,PU-Dämmschicht, Baustoffklasse B2, FCKW-frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

Lataukset

Alles online

Asennusohje (PDF)
CAD 2D (DXF)
Mittapiirustus (PDF)
CAD (DWG)
Esite (PDF)