# LORO-X COMPOSITE ADJUSTMENT PIECE FOR SIPHONIC FLOW DN 40/32

**LORO-Composite pipe balancing piece DN 40/32**

## Beskrivelsestekst

LORO-DRAINJET compound pipe adjustment piece, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN40/32

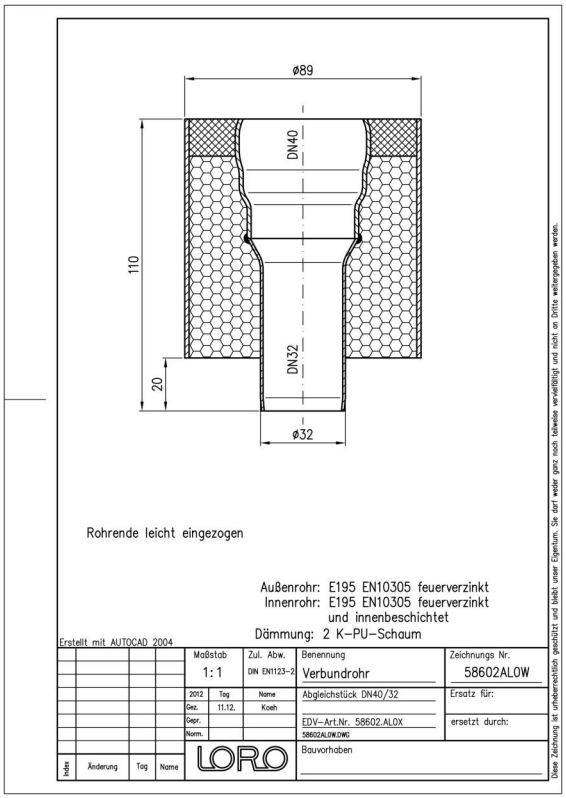


## Artikkeldata

| | |
|---|---|
| **EAN-kode** | **4038088086421** |
| **ETIM-klasse** | **EC003024** |
| **Nominell diameter** | **DN 40, DN 32** |
| **Utvendige mål (HxBxL)** | **89 x 89 x 110 mm** |
| **Vekt** | **0,50 Kg (STK)** |
| **Produktgruppe** | **3** |
| **Tolltariffnummer** | **73089098** |
| **Materiale / Farge** | **Stahl feuerverzinkt, Silber** |

## Bruksanvisning

kein Verwendungshinweis notwendig

## Nedlastinger

Alles online

Måltegning (PDF)
Brosjyre (PDF)
CAD 2D (DXF)
CAD (DWG)